



Item No. _____

772

Soft Serve Freezer

Two Flavor



772

Features

Offer all the popular soft serve variations from low or non-fat ice creams, to custards, yogurt, and sorbet in two separate flavors.

Freezing Cylinder

Two, 7 quart (6.6 liter).

Mix Hopper

Two, 20 quart (18.9 liter). Separate hopper refrigeration (SHR) maintains mix below 41°F (5°C) during Auto and Standby modes.

Indicator Lights

Add Mix light alerts operator to add mix.

Electronic Controls

Finished product quality is monitored by Softech™ controls that measure viscosity.

Standby

During long no-use periods, the standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.

Two Locking Casters

Front casters have a locking feature for operators to lock to maintain equipment in place. The locking casters can be released to move the equipment for cleaning.



Shown with Flavor Burst System

750 N. Blackhawk Blvd. Rockton, Illinois 61072
800-255-0626
Phone 815-624-8333 Fax 815-624-8000
www.taylor-company.com
info@taylor-company.com

ISO 9001:2015
Registered Firm




Standard 6



Selected 50/60
Hz. Models



LISTED
SA2650

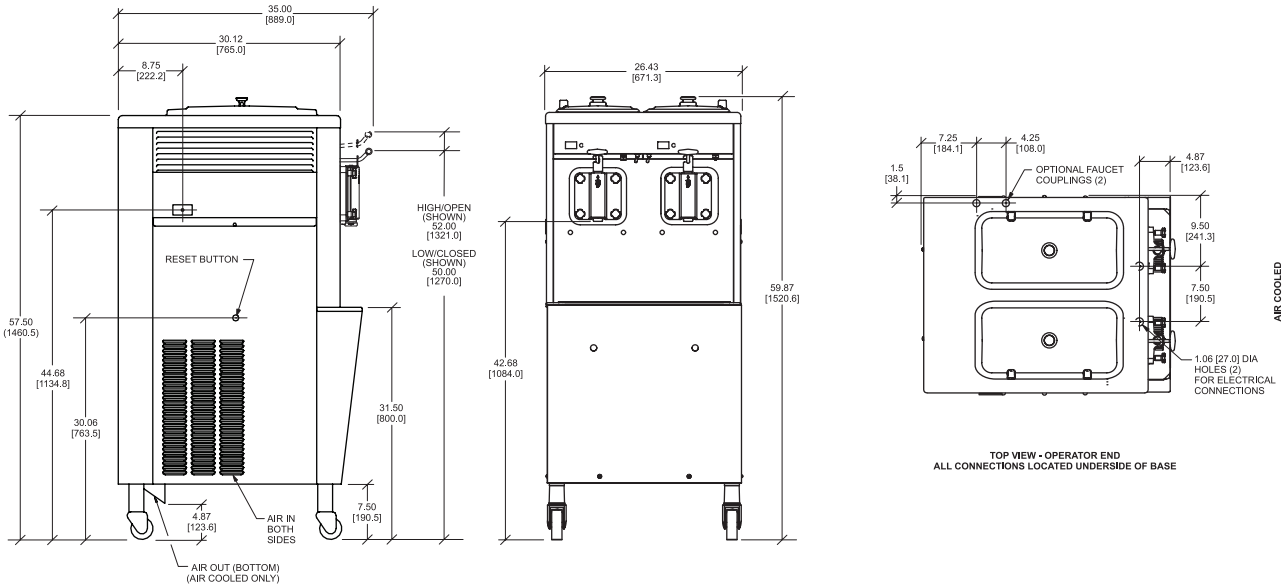

FIGURES IN BRACKETS INDICATE MILLIMETERS / DECIMAL DIMENSIONS EQUAL TO (PLUS OR MINUS 1/16 INCH [1.5 mm]).

Weights	lb.	kg			
Net	630	285.8			
Crated	700	317.5			
<i>*For reference only</i>					
	cu. ft.	cu. m.			
Volume	46.2	1.3			
Dimensions	in.	mm			
Width	26-7/16	672			
Depth	35	889			
Height	59-7/8	1,521			
Floor Clearance	7-1/2	191			
<i>*Mounted on standard casters</i>					
Electrical	Maximum Fuse Size		Minimum Circuit Ampacity	Poles (P) Wires (W)	
	Left	Right	Left	Right	
208-230/60/3	25	20	19	15	3P 4W
220-240/50/1	30	25	24	20	3P 4W

This unit may be manufactured with other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements.

(For exact electrical information and approval marks, always refer to the data label of the unit.)

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____
Neutral: ☐ Yes ☐ No **Cooling:** ☐ Air ☐ Water ☐ NA

Options:

All options may not be available in combination with others or with all electrical or cooling configurations. Please consult your local Taylor distributor.

Authorized Taylor Distributor

Specifications

Electrical

Two dedicated electrical connections are required. See the Electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult your local Taylor distributor for cord & receptacle specifications as local codes allow.

Beater Motor

Two, 2.0 hp.

Refrigeration System

Two, 9,200 BTU/hr. R449A.

Separate Hopper Refrigeration (SHR), One, 400 BTU/hr. R134A.
(BTUs may vary depending on compressor used.)

Air-Cooled

Minimum 3" (76 mm) around all sides. Install the deflector provided to prevent recirculation of warm air. Minimum air clearances must be met to assure adequate airflow for optimum performance.