


## FIRE RATED 093V EXPANSION

| STOCK # | NAME            | PCS/BOX |
|---------|-----------------|---------|
| 093X-V  | FIRE RATED 093V | 20      |

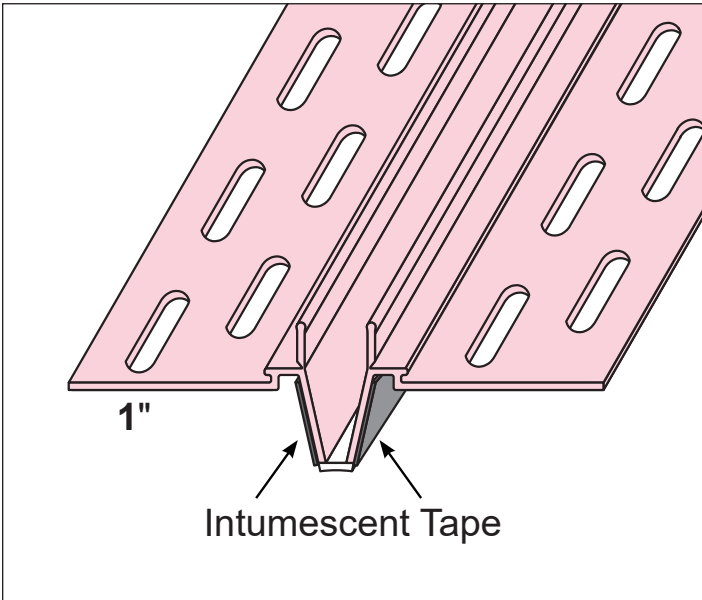

**Description:** 093X-V is a composite control joint with intumescent tape factory applied to the back side of the control joint. 093X-V has been tested according to UL-2079 "Test for Fire Resistance of Building Joint Systems" and is used to relieve stresses of expansion and contraction of drywall interior partitions or ceilings running in a horizontal or vertical direction in both metal or wood framing on one side or both sides of the wall. 093X-V is pink in color and features a co-extruded flexible PVC center that is designed to provide a full  $\frac{3}{8}$ " of protection against the stresses of expansion and contraction.

**Advantages:** Made from rust proof, dent resistant PVC to reduce jobsite and handling damage. Does not contain cellulose, a potential food source for mold. Intumescent tape expands when exposed to flame for increased fire protection.

**Limitations:** Product is designed for interior use.

**Applicable Standards:** Rigid PVC products meet ASTM specifications D3678-97 Class 2, D1784-03, C1047-99 and achieve a Class A rating for flame spread and smoke developed when tested under ASTM E84-10. UL-2079 Standard for Tests for Fire Resistance of Building Joint Systems.

**Surface Characteristics:** Trim-Tex products are made from PVC. PVC does not support combustion and is self extinguishing when the source of flame or heat is removed.

**Installation:** Trim-Tex recommends following established acceptable industry standard installation methods. Detailed installation instructions can be found at [www.trim-tex.com](http://www.trim-tex.com).

**Finishing:** Always use a high quality paint.

**Accessories:** 847 Spray Adhesive and Safety Products distributed by [capdrywalltrims.com](http://capdrywalltrims.com)

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Date \_\_\_\_\_

Approvals (Signatures or Stamps)