



Product Data Sheet

# STR SERIES

"Z" Shadow Bead


SAMPLE SPECIFICATION

specify as: SOFTFORMS® Model # STR-XXX-XXX


The extruded aluminum profile shall incorporate a continuous integral fin for surface contact to conventionally installed gypsum drywall. The fins shall be 7/8" wide and shall be tapered to the edge. The tapered fins shall be punched with holes staggered to accept standard screw fastening. A series of continuous grooves shall be extruded into the face of the fins to provide greater bonding surface. The extruded profiles shall be primed with corrosion-resistant primer compatible with materials normally in use in conjunction with commercial interiors, i.e.: joint compound, latex and enamel paints, and wall covering adhesives.

MATERIAL: Aluminum alloy.....6063 T5 or equal  
Finish.....Factory primed

Below is the complete listing of SOFTFORMS© extruded aluminum "Z" Shadow Bead profiles for drywall construction. All SOFTFORMS© extrusions come with a opaque, greenish color etched corrosion resistant primer compatible with materials normally used in conjunction with drywall construction.

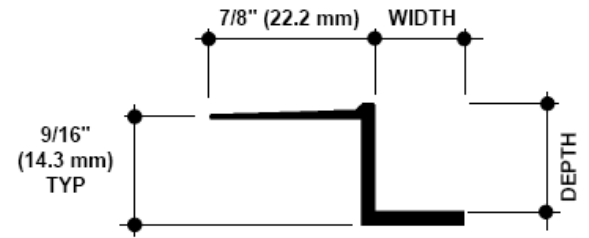


STR-XXX-063  
(for 5/8" GPDW)

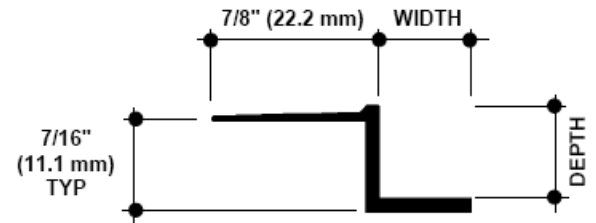

STR-XXX-050  
(for 1/2" GPDW)

STR Model No.	Width	Depth
STR-025-025	1/4"	1/4"
STR-038-038	3/8"	3/8"
STR-013-050	1/8"	1/2"
STR-025-050	1/4"	1/2"
STR-038-050	3/8"	1/2"
STR-050-050	1/2"	1/2"
STR-063-050	5/8"	1/2"
STR-075-050	3/4"	1/2"
STR-100-050	1"	1/2"
STR-150-050	1 1/2"	1/2"
STR-200-050	2"	1/2"
STR-013-063	1/8"	5/8"
STR-025-063	1/4"	5/8"
STR-038-063	3/8"	5/8"
STR-050-063	1/2"	5/8"
STR-063-063	5/8"	5/8"
STR-075-063	3/4"	5/8"
STR-100-063	1"	5/8"
STR-150-063	1 1/2"	5/8"
STR-200-063	2"	5/8"

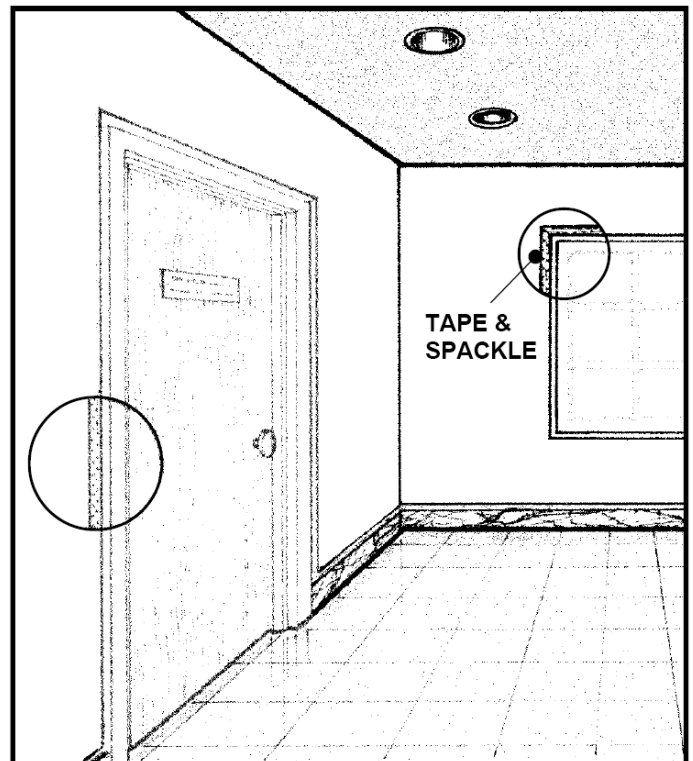

All details, methods and specifications are the exclusive property of Pittcon Softforms® LLC. All Softforms® profiles are 10' lengths ± 1/8".