



## POWERFUL

A unique and powerful rapid-dry™ form release agent designed *specifically* for the concrete industry.

## SAFE

NON-STAINING  
BIODEGRADABLE  
ODORLESS  
ENVIRONMENTALLY SAFE


## VERSATILE

USE ON - METAL  
WOOD  
PLASTIC  
FIBERGLASS  
RUBBER  
AND MORE

METHOD 24  
VOG COMPLIANT

# A+ FORM RELEASE

*Designed specifically for the Concrete Industry!*

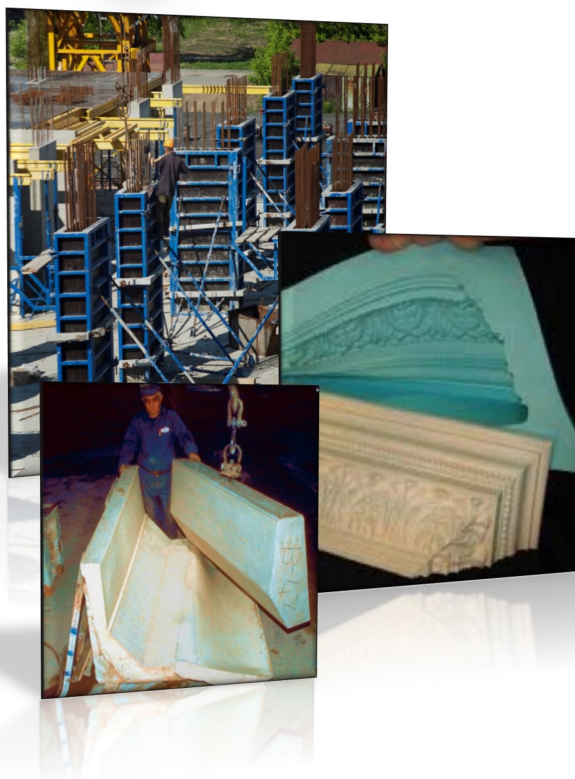

- PROPRIETARY NON-STAINING FORMULA
- DOES NOT INHIBIT PAINT ADHESION
- SPECIAL RAPID-DRY™ FORMULA STACK FORMS IMMEDIATELY
- PROTECTS AGAINST RUST & CORROSION
- REDUCES CLEAN-UP TIME
- ECONOMICAL AND VERSATILE

A+ is a unique and powerful form release **agent** designed specifically for the concrete industry.

We use only the highest-quality ingredients, resulting in a superior product with exceptional release properties.

A+ is safe to use on previously treated forms. Use on metal, wood, plastic or fiberglass. Does not wash off with rain. Dramatically reduces clean-up time.

Will not interfere with the bonding of paint or other coatings.

Proprietary rapid-dry™ formula allows forms to be stacked immediately after application. Helps protect from rust, weather and corrosion.

Meets or exceeds non-staining requirements of the Corps of Engineers, GSA and the Bureau of Reclamation.



Advanced, earth-friendly chemicals for the concrete industry.



# A+ FORM RELEASE

*Designed specifically for the Concrete Industry!*

## Application

Spray application is recommended but A+ can be applied by other conventional methods. Apply even coat to clean, dry forms avoiding puddles, runs. Sprayer must be cleaned with mineral spirits.

## Limitations

Not for use on tilt-up casting slabs or plaster waste molds.

## Coverage

-Plywood: Up to 1,200 sq. ft. per gal

-Steel, plastic, and fiberglass: Up to 2,200 sq. ft per gal.

-Aluminum or Elastomeric Urethane: Up to 2,200 sq. ft. per gal.

Form brackets, concrete buckets, tie rods, shoring, and scaffolding can be treated daily, or as needed, to soften concrete buildups and prevent further accumulations.

## Technical Data

Color.....4 (ASTM D-2300)

Clarity.....Clear

Viscosity.....30 SSU @ 100 F.

Pour Point...0 F.

Flash Point..265 F.

Density.....7.5 lbs./gal.

## Warning

Keep away from sparks or open flames. Contains petroleum distillates and will burn. Store away from heat. Do not take internally and avoid contact with the skin and eyes. Do not cut on empty drums with a cutting torch.

## LEED Credit

May contribute to LEED credits.

IEQ ..... 4.1 Low Emission

MR..... 1.1 Const. Waste Mgm't.

MR4..... Recycled Content

MR5..... Regional Materials

Method 24 VOC Compliant

ASTM-D5864 Biodegradable

## Available Sizes

•275 gallon tote

•55 gallon drum

•5 gallon bucket



**concrete**  
CHEMICALS

Advanced, earth-friendly chemicals for the concrete industry.



**Approved**

## CONTACT US

Concrete Chemicals, Inc.  
25385 Hwy 169  
Zimmerman, MN 55398

844.289.2532

CONCRETECHEMICALS.COM