


ELEVATION VIEW SHAFT SIDE

FIELD SURVEY DRILLING BLANK  
TWO-SPEED RIGHT/LEFT HAND OPENING  
HATCH DOOR

LEFT HAND AS SHOWN  
RIGHT HAND OPPOSITE

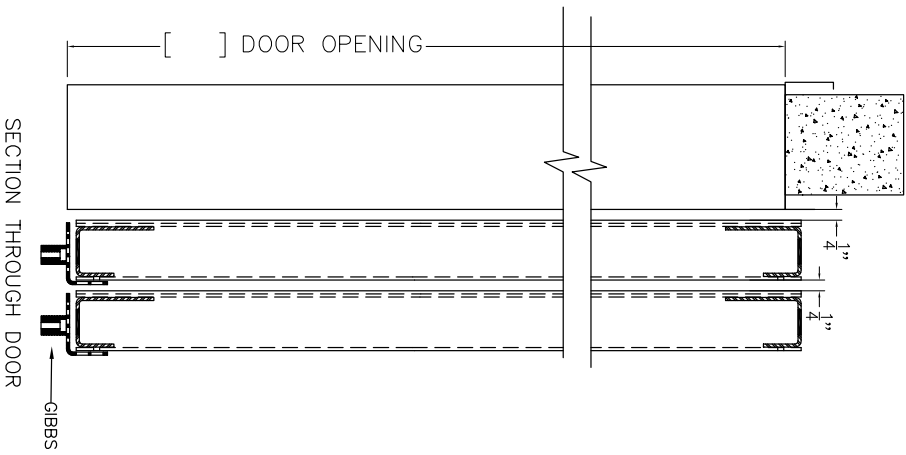

GENERAL SPECIFICATIONS & DATA

DOOR(S) REQUIRED:

- LEFT HAND AS SHOWN
- RIGHT HAND OPPOSITE

DOOR CONSTRUCTION: 16/14GA CRS

UL B 1 1/2" HOUR FIRE RATED

DOOR FINISH:

- STAINLESS STEEL
- MUNTZ
- CRS, PAINTED
- PLASTIC LAMINATE

GIBBS REQUIRED: (2 PER DOOR)

SAFETY RETAINER: (1 PER DOOR)

DOOR DRILLING:

- GAL
- MAC
- OTS
- OTHER

TOP DOOR TAP SIZE

- 1/4"-20
- 1/2"-13
- OTHER

DIMENSION TABLE

| SYMBOL | DIMENSION |
|--------|-----------|
| A      |           |
| B      |           |
| C      |           |
| D      |           |
| E      |           |

TITLE: TWO-SPEED SIDE OPENING HATCH DOOR

CUSTOMER:

JOB NAME:

LOCATION:

ARCHITECT:

DRAWN BY: AA

SCALE: NONE

SHEET NO  
1 OF 2