DETAIL I

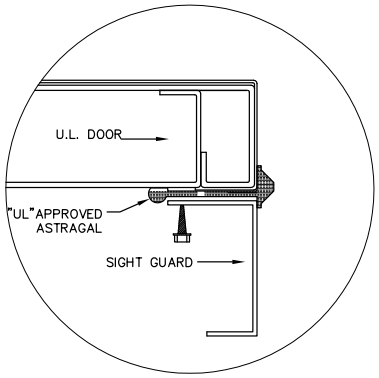

FIELD SURVEY DRILLING BLANK
SINGLE-SPEED CENTER OPENING
HATCH DOOR

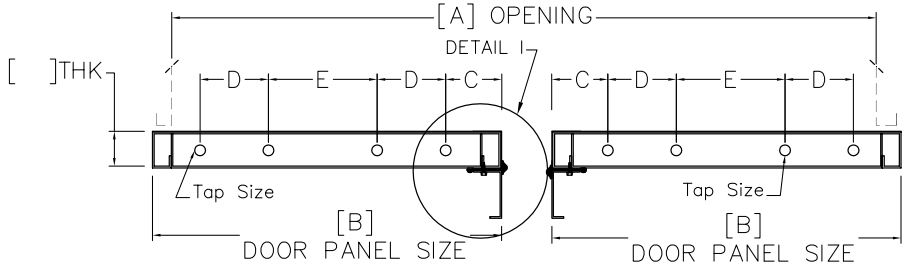

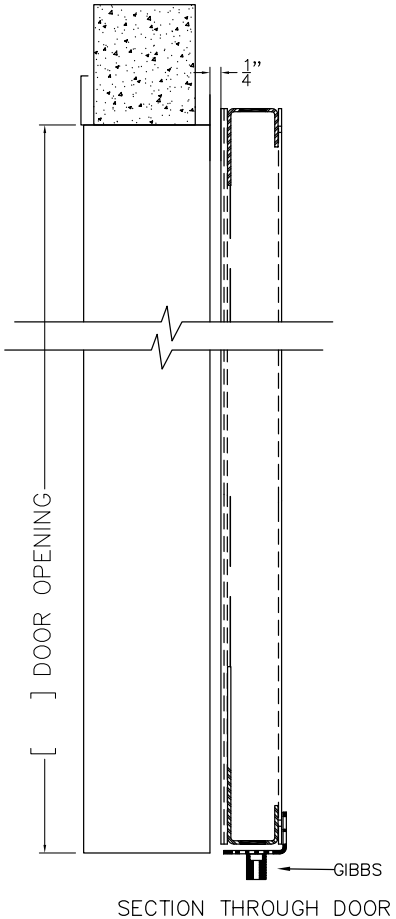

SECTION THROUGH DOOR

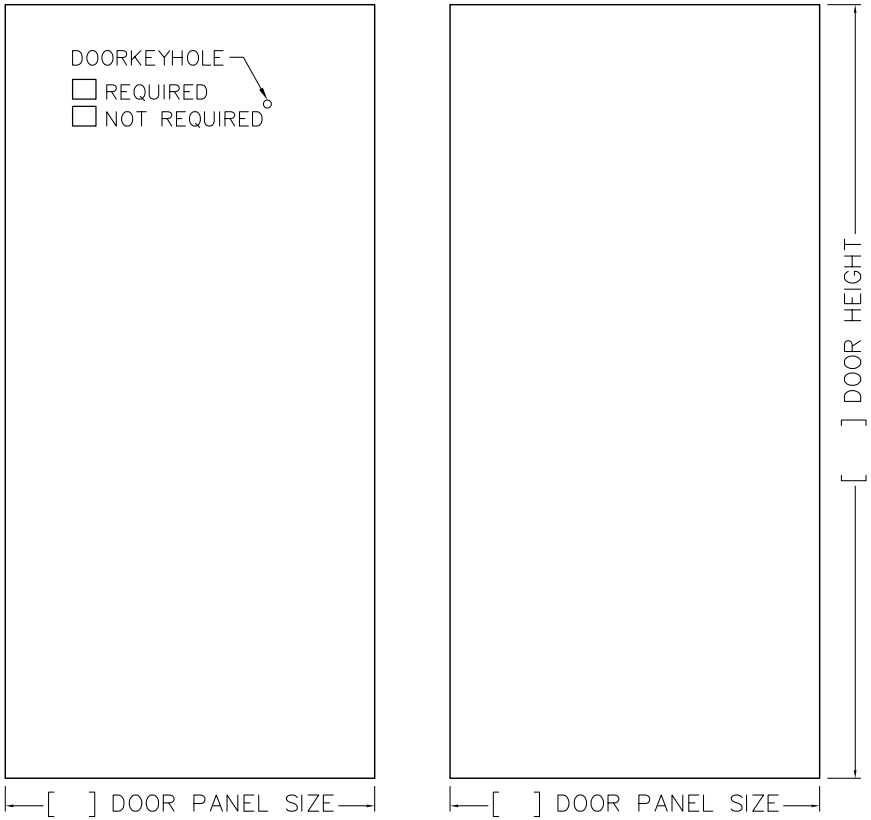

(ELEVATION VIEW SHAFT SIDE)

GENERAL SPECIFICATIONS & DATA

DOOR SETS REQUIRED: _____

DOOR CONSTRUCTION: 16GA CRS
UL B 1 1/2" HOUR FIRE RATED

DOOR FINISH:
- ☐ STAINLESS STEEL
- ☐ MUNTZ
- ☐ CRS, PAINTED
- ☐ PLASTIC LAMINATE

GIBBS REQUIRED: (2 PER DOOR)
SAFETY RETAINER: (1 PER DOOR)

DOOR DRILLING:
- ☐ GAL
- ☐ MAC
- ☐ OTIS
- ☐ OTHER_____

TOP DOOR TAP SIZE
- ☐ 1/4"-20
- ☐ 1/2"-13
- ☐ OTHER_____

DIMENSION TABLE	
SYMBOL	DIMENSION
A	
B	
C	
D	
E	

TITLE: SINGLE-SPEED CENTER OPENING HATCH DOOR
CUSTOMER:
JOB NAME:
LOCATION:
ARCHITECT: SCALE: NONE
DRAWN BY: AA