




MALLARD
MANUFACTURING
YOUR GRAVITY FLOW SPECIALISTS

1-3/8" Diameter Gravity Roller Conveyor

STANDARD SPECIFICATIONS

Tube:	1-3/8" O.D. x 18 Gauge
Axle:	5/16" Round Spring Loaded
Roller:	18 Gauge Galvanized Steel
Range:	10" – 30"
Roller Centers:	1-1/2", 2", 3"
Roller Capacity	90 lbs
Frames:	Standard 2 1/2", 1" flange. Custom Heights Available
Lengths:	5' & 10' Custom Lengths Available

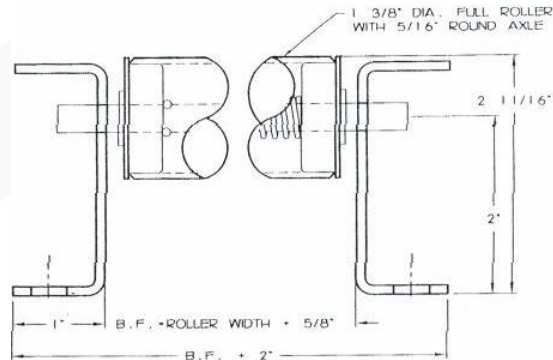

STANDARD 10' SECTIONS

BF Size	OAW	Model # Frame-Roller-Axle-BF-Length-Ctrs	Roller Centers	Wt (lbs)
10"	12"	CR125-141831R-10BF-10-1.5	1.5"	126
		CR125-141831R-10BF-10-2	2"	104
		CR125-141831R-10BF-10-3	3"	82
12"	14"	CR125-141831R-12BF-10-1.5	1.5"	140
		CR125-141831R-12BF-10-2	2"	115
		CR125-141831R-12BF-10-3	3"	89
14"	16"	CR125-141831R-14BF-10-1.5	1.5"	155
		CR125-141831R-14BF-10-2	2"	126
		CR125-141831R-14BF-10-3	3"	96
16"	18"	CR125-141831R-16BF-10-1.5	1.5"	169
		CR125-141831R-16BF-10-2	2"	136
		CR125-141831R-16BF-10-3	3"	104
18"	20"	CR125-141831R-18BF-10-1.5	1.5"	183
		CR125-141831R-18BF-10-2	2"	147
		CR125-141831R-18BF-10-3	3"	111
20"	22"	CR125-141831R-20BF-10-1.5	1.5"	198
		CR125-141831R-20BF-10-2	2"	158
		CR125-141831R-20BF-10-3	3"	119
22"	24"	CR125-141831R-22BF-10-1.5	1.5"	212
		CR125-141831R-22BF-10-2	2"	169
		CR125-141831R-22BF-10-3	3"	126
24"	26"	CR125-141831R-24BF-10-1.5	1.5"	226
		CR125-141831R-24BF-10-2	2"	180
		CR125-141831R-24BF-10-3	3"	134
26"	28"	CR125-141831R-26BF-10-1.5	1.5"	240
		CR125-141831R-26BF-10-2	2"	190
		CR125-141831R-26BF-10-3	3"	141
28"	30"	CR125-141831R-28BF-10-1.5	1.5"	254
		CR125-141831R-28BF-10-2	2"	201
		CR125-141831R-28BF-10-3	3"	148
30"	32"	CR125-141831R-30BF-10-1.5	1.5"	268
		CR125-141831R-30BF-10-2	2"	212
		CR125-141831R-30BF-10-3	3"	156

STANDARD 5' SECTIONS

Model # Frame-Roller-Axle-BF-Length-Ctrs	Roller Centers	Wt (lbs)
CR125-141831R-10BF-5-1.5	1.5"	63
CR125-141831R-10BF-5-2	2"	52
CR125-141831R-10BF-5-3	3"	41
CR125-141831R-12BF-5-1.5	1.5"	70
CR125-141831R-12BF-5-2	2"	58
CR125-141831R-12BF-5-3	3"	45
CR125-141831R-14BF-5-1.5	1.5"	78
CR125-141831R-14BF-5-2	2"	63
CR125-141831R-14BF-5-3	3"	48
CR125-141831R-16BF-5-1.5	1.5"	85
CR125-141831R-16BF-5-2	2"	68
CR125-141831R-16BF-5-3	3"	52
CR125-141831R-18BF-5-1.5	1.5"	92
CR125-141831R-18BF-5-2	2"	74
CR125-141831R-18BF-5-3	3"	56
CR125-141831R-20BF-5-1.5	1.5"	99
CR125-141831R-20BF-5-2	2"	79
CR125-141831R-20BF-5-3	3"	60
CR125-141831R-22BF-5-1.5	1.5"	106
CR125-141831R-22BF-5-2	2"	85
CR125-141831R-22BF-5-3	3"	63
CR125-141831R-24BF-5-1.5	1.5"	113
CR125-141831R-24BF-5-2	2"	90
CR125-141831R-24BF-5-3	3"	67
CR125-141831R-26BF-5-1.5	1.5"	120
CR125-141831R-26BF-5-2	2"	95
CR125-141831R-26BF-5-3	3"	71
CR125-141831R-28BF-5-1.5	1.5"	127
CR125-141831R-28BF-5-2	2"	101
CR125-141831R-28BF-5-3	3"	74
CR125-141831R-30BF-5-1.5	1.5"	134
CR125-141831R-30BF-5-2	2"	106
CR125-141831R-30BF-5-3	3"	78

Product Spec Sheet

101 Mallard Road, Sterling, IL.61081

Phone: 800-243-6694 Fax: 815-625-9498 Email: info@mallardmfg.com www.mallardmfg.com