

Adhesive Transfer Tower

The Bulk Adhesive Transfer Tower automatically transfers adhesive from the manufacturers shipping container into a standard hopper feeder. A level sensor signals the operator with both an audible and a visible alarm when empty. The fully enclosed system keeps your adhesive from becoming environmentally contaminated during refill while also ensuring maximum run time. When the shipping container runs empty the Dynafill reservoir will keep your line running until a fresh container of adhesive is placed on top of the Transfer Tower.

ADHESIVE TRANSFER TOWER:

- Heavy duty stainless steel angle construction.
- Level-control system that alerts the line operator when the shipping container needs to be replaced.
- Internal and external (optional) vibratory packages ensure adhesive flow.
- Spring-loaded transfer-funnel assembly provides an excellent seal to the shipping container.

Convenience

Bulk adhesive unloaded directly from the adhesive manufacturers shipping container.

Reliability

Vibratory packages ensure consistent and reliable adhesive movement.

Quality

Rugged, angled stainless steel construction ensures stability and durability.



ITW Dynatec - Adhesive Transfer Tower

The Dynatec Difference...

Safety & Efficiency




Increasing your efficiency, reducing costs and a safer working environment are all added benefits when using the ITW Dynatec Transfer Tower. The Transfer Tower provides a convenient and efficient way to handle your bulk hot melt adhesive containers with little operator interface. It eliminates the need to manually handle your adhesive refilling needs, thus giving the added benefit of safety by removing the operator from the process. Its rugged

construction will provide years of uninterrupted service backed by the unbeatable service and support of ITW Dynatec.

Adhesive Transfer Tower

System	Tilt Platform
Container Capacity	2000 lbs

Dimensions	Tilt Platform
Height (H)	185.42 cm (73 in)
Depth (D)	139.7 cm (55 in)
Width (W)	120 cm (47.25 in)

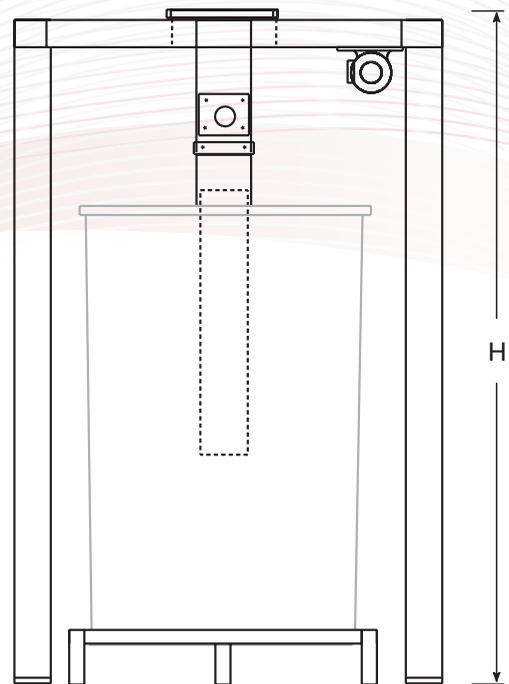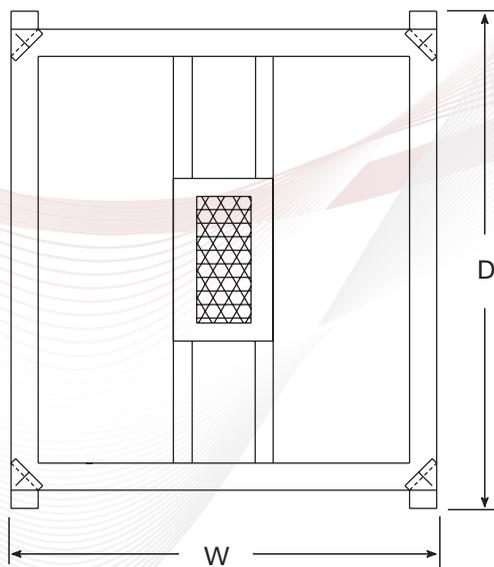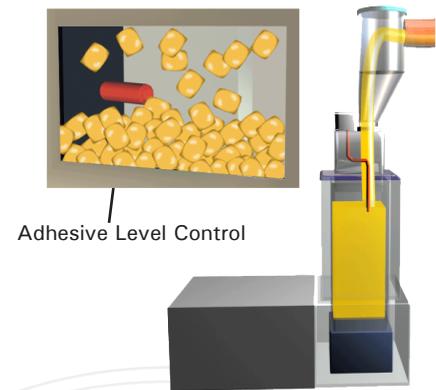

ITW Dynatec

ASIA

ITW Dynatec Suzhou
Unit2, B1 Building
No.9 Weixin Road
SIP, Suzhou, China 215122
Telephone +86.512.6289.0620
Fax +86.512.6289.0621
dynatecsuzhou@itwdynatec.cn

AMERICAS

ITW Dynatec
31 Volunteer Drive
Hendersonville, TN 37075
Telephone 615•824•3634
+1.800.860.6150
Fax +1.615.264.5248
dynatec@itwdynatec.com

JAPAN

ITW Dynatec K.K.
Tsukimura Building 5th Floor
26-11, Nishikamata 7-chome
Ota-ku, Tokyo 144-0051, Japan
Telephone +81.3.5703.5501
Fax +81.3.5703.5505
info@itwdynatec.co.jp

EUROPE, AFRICA and MIDDLE EAST

ITW Dynatec GmbH
Industriestrasse 28
D-40822 Mettmann, Germany
Telephone +49.210.4915.0
Fax +49.210.491.5111
e.mail@itwdynatec.de

© 12/2010 ITW Dynatec

ITW Dynatec reserves the right to discontinue or change specifications, designs, materials and equipment without notice or obligation.

Visit us at www.itwdynatec.com