

Sequoia 6"x24"




MARROW



HEARTWOOD



RING

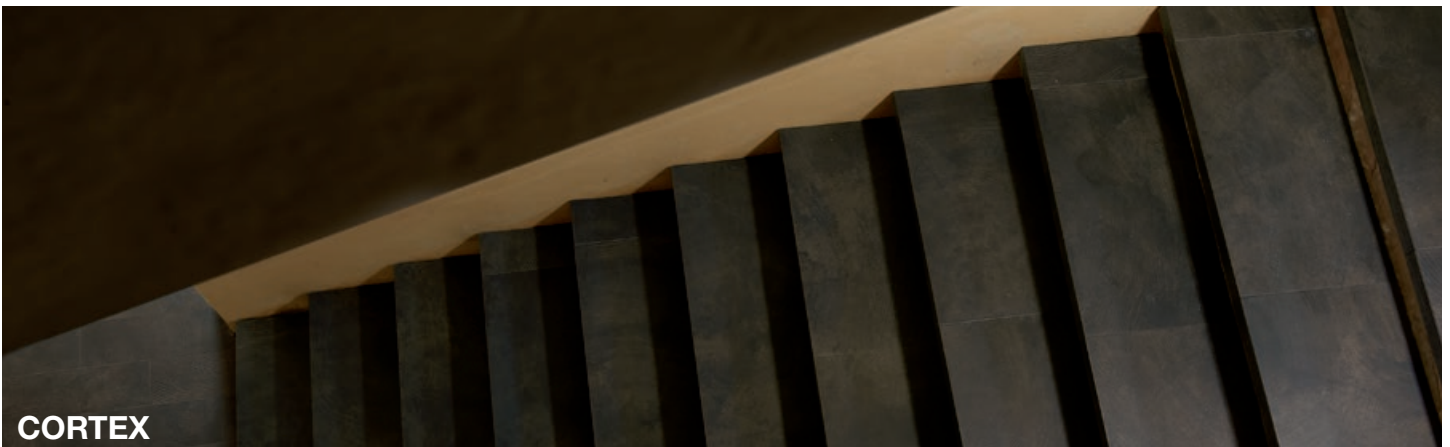


CORTEX


Sequoia 6"x24"



Dry - Pressed Ceramic Tiles ISO 13006 : 2012 Annex G - UNI EN 14411 : 2012 Annex G - Bla GL

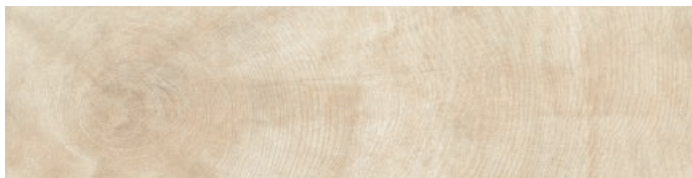


MARROW 6"x24"

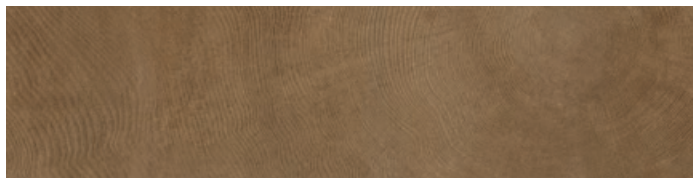

RING 6"x24"



HEARTWOOD 6"x24"

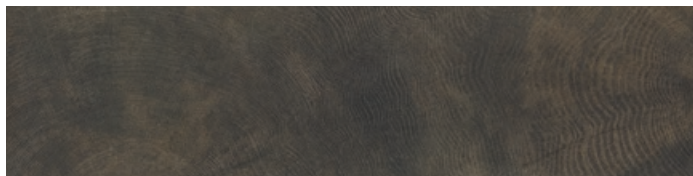

CORTEX 6"x24"

PACKING AND WEIGHT


SIZE	PIECES / CARTON	SF/CARTON	CARTON/PALLET	SF/PALLET	SF/PIECE	LBS/CARTON
6"x24"	12	11.6	50	581.0	0.9684	55

TECHNICAL FEATURES

	STANDARD	VALUE	
Flatness	UNI EN ISO 10545/2	± 0,26% / ± 1,5mm	
	ASTM C485 Warpage		
	Calibrated ± 0,75% (max ± 0,09 in)	-	
Water absorption - Average value expressed in %	Rectified ± 0,40% (max ± 0,05 in-size ≤ 60cm) (max ± 0,07 in-size > 60cm)	± 0,25% (max ± 0,05 in-size ≤ 60cm) (max ± 0,07 in-size > 60cm)	
	UNI EN ISO 10545/3 ≤ 0,5 %	Compliant	
	ASTM C373		
Modulus of rupture	UNI EN ISO 10545/4	≥ 50 N/mm ²	
	Breaking strength	UNI EN ISO 10545/4	≥ 2000 N
ASTM C648		700 LBS	
Frost resistance	UNI EN ISO 10545/12	Compliant	
	ASTM C1026	Unaffected	
Chemical resistance to high and low acid and basic concentrations	UNI EN ISO 10545/13	GA - GLA	
	ASTM C-650	Unaffected	
Stain resistance	UNI EN ISO 10545/14	5	
	CTI 81-7D	No Evident Variation	
		Naturale	Lucidato
Slip resistance	DIN 51130	R11	R10
	DWIN 51097	C (A+B+C)	B (A+B)
	ANSI A 137.1- 2012	Dry: 0,71*	Dry: 0,69*
	DCOF (Section 9.6)	Wet: 0,63*	Wet: 0,56*
	B.C.R.A.	≥ 0,40	≥ 0,40

* Values obtained with certificate n° 20130041.
Date 02/12/2013.

For further information on technical specifications, please consult our up-dated general catalogue.



16610 Gale Ave. • Industry, CA 91745
Tel. (626) 961-0051 • Fax (626) 336-2217